

Fig. 1

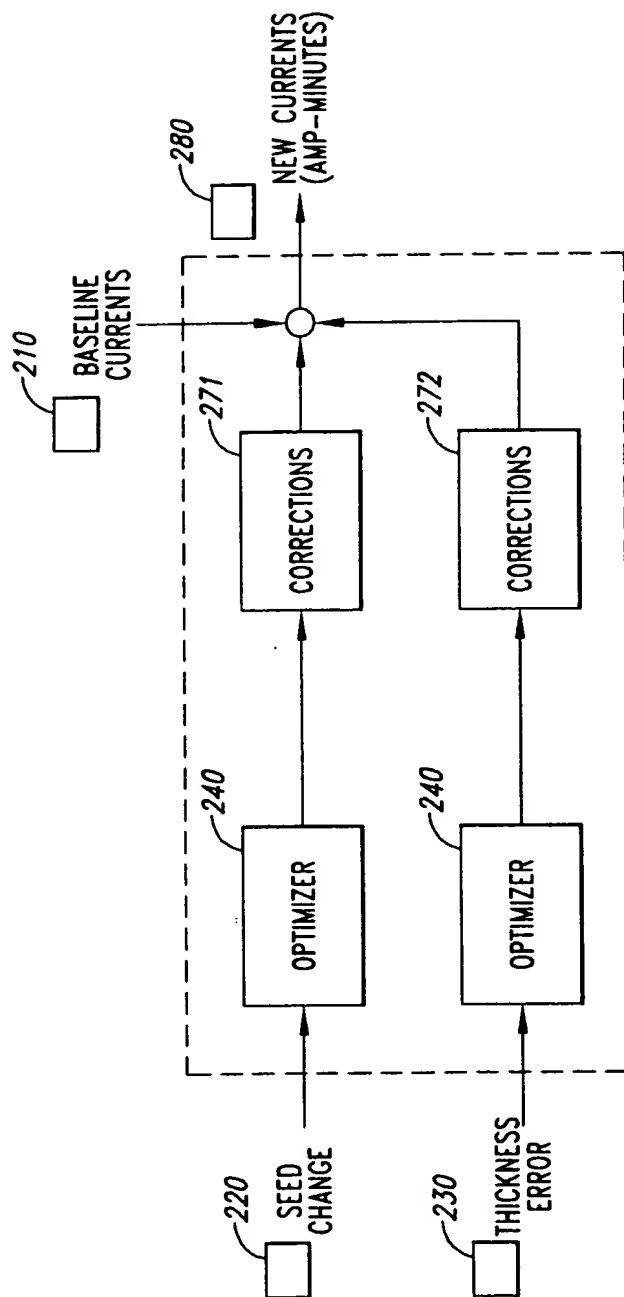


Fig. 2

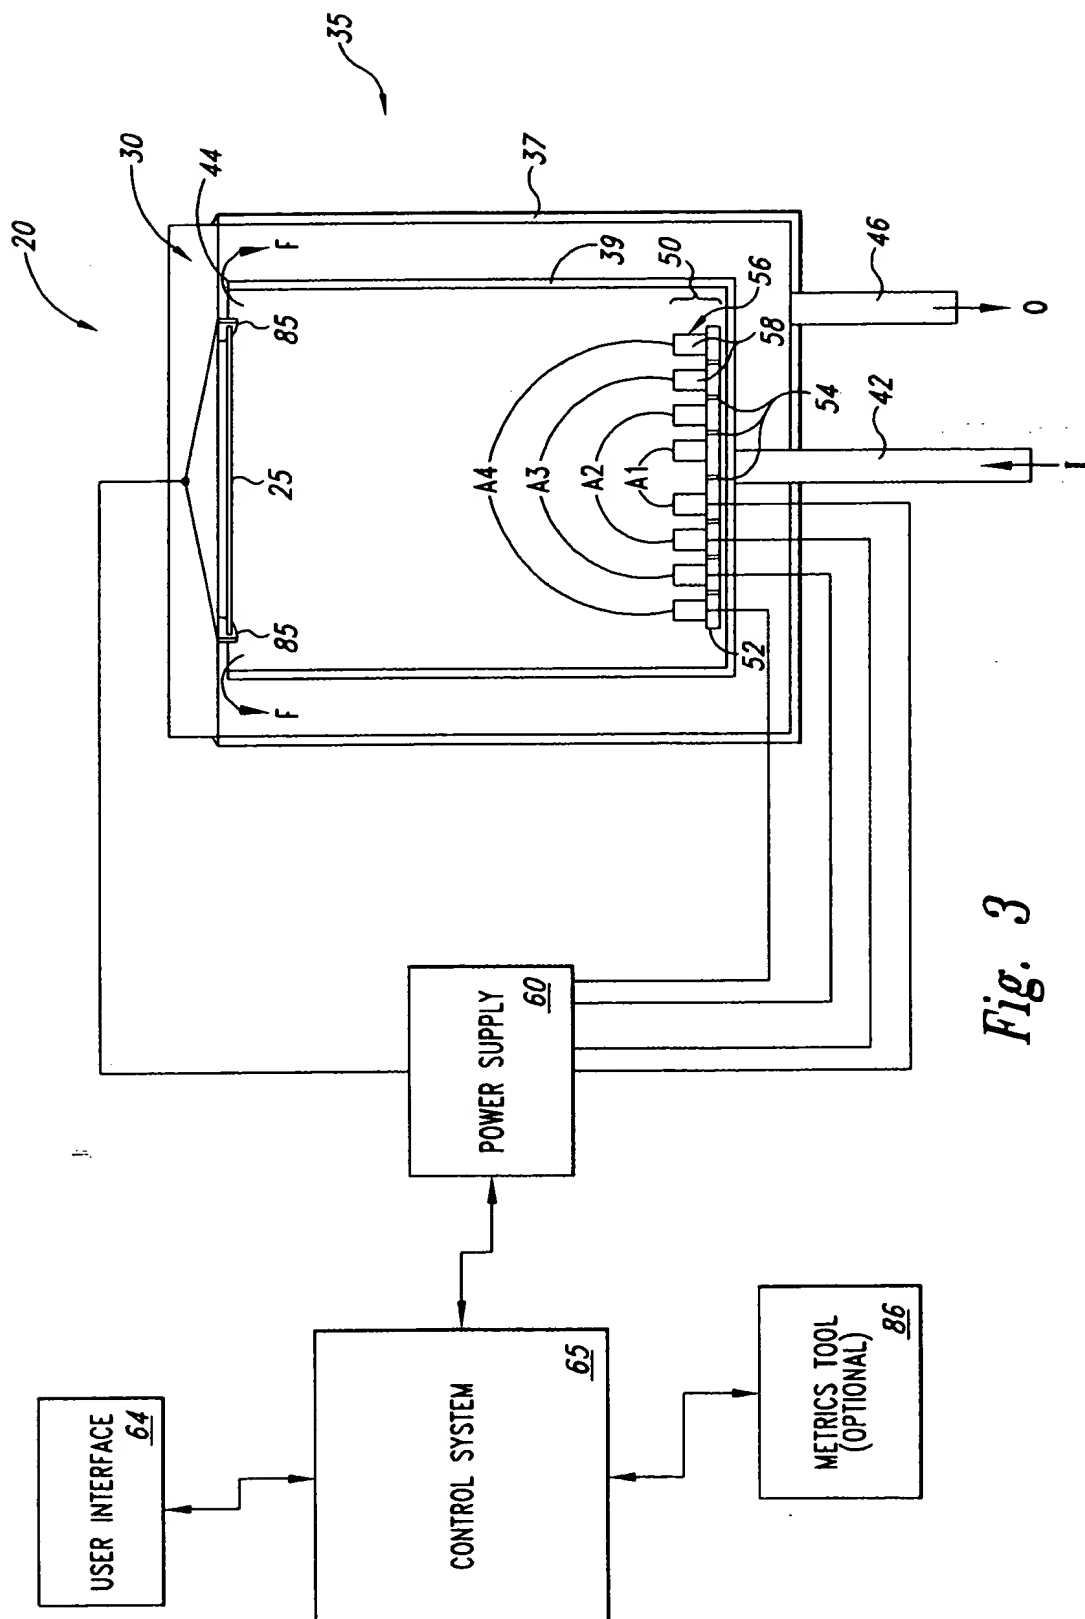
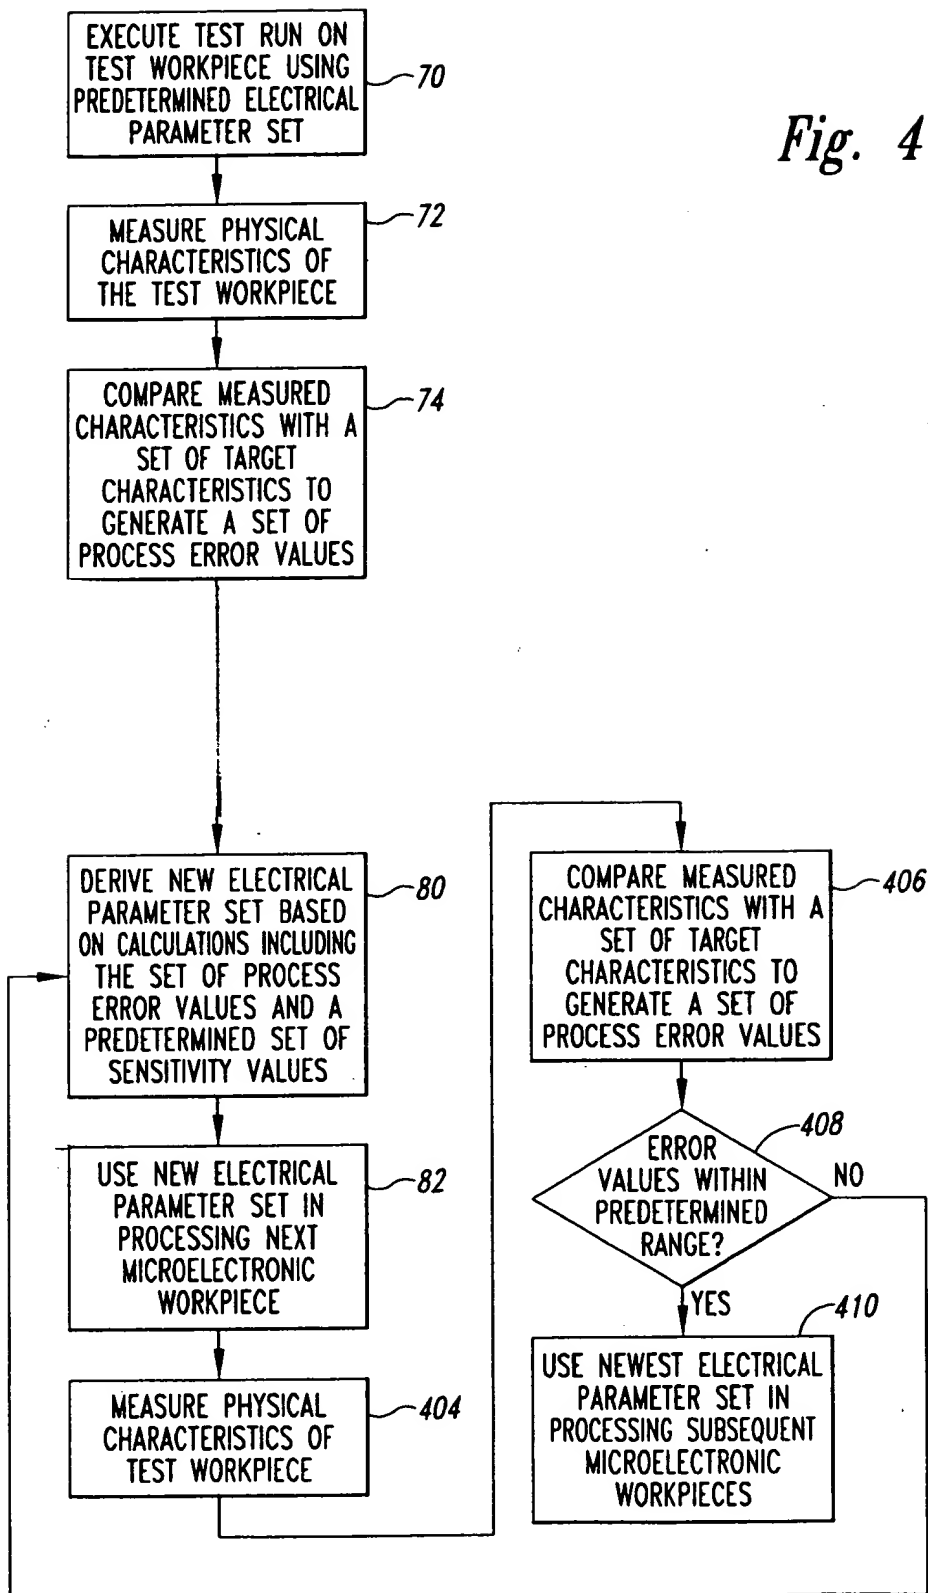


Fig. 4



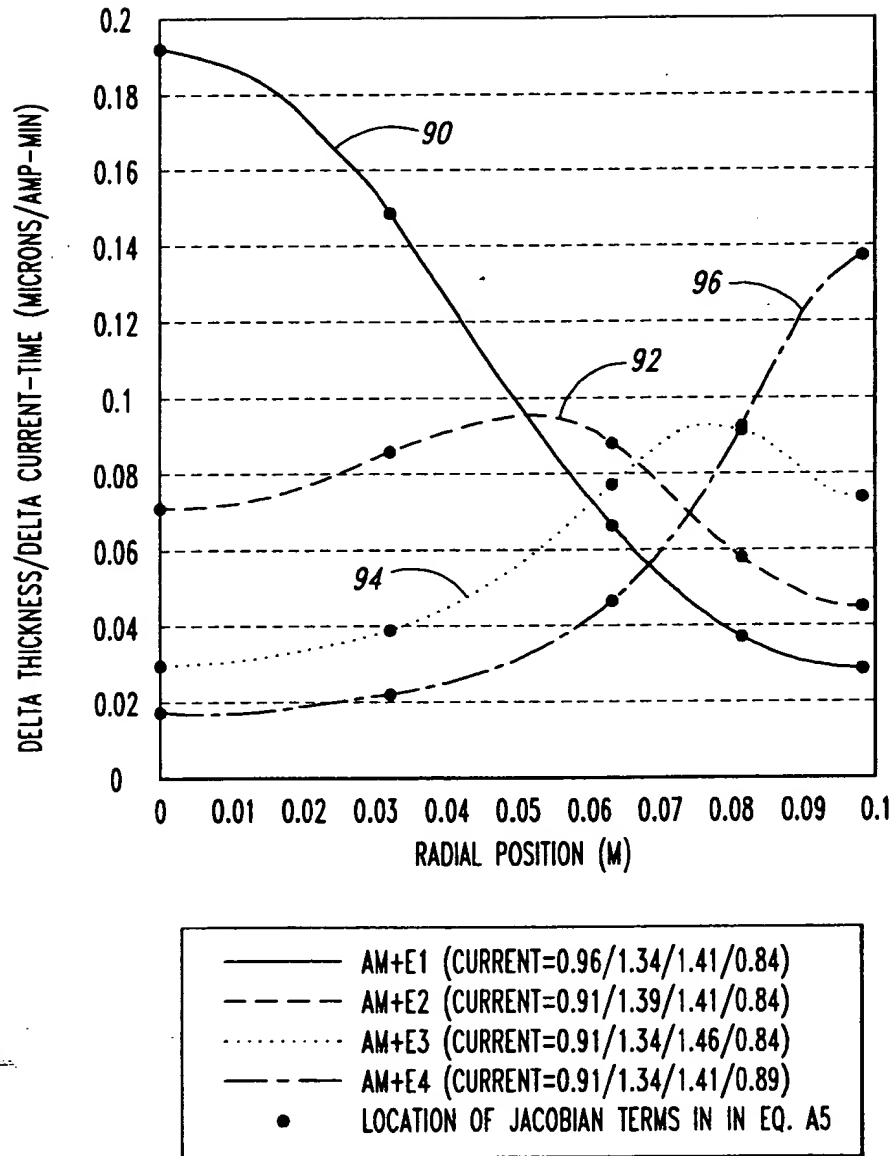


Fig. 5

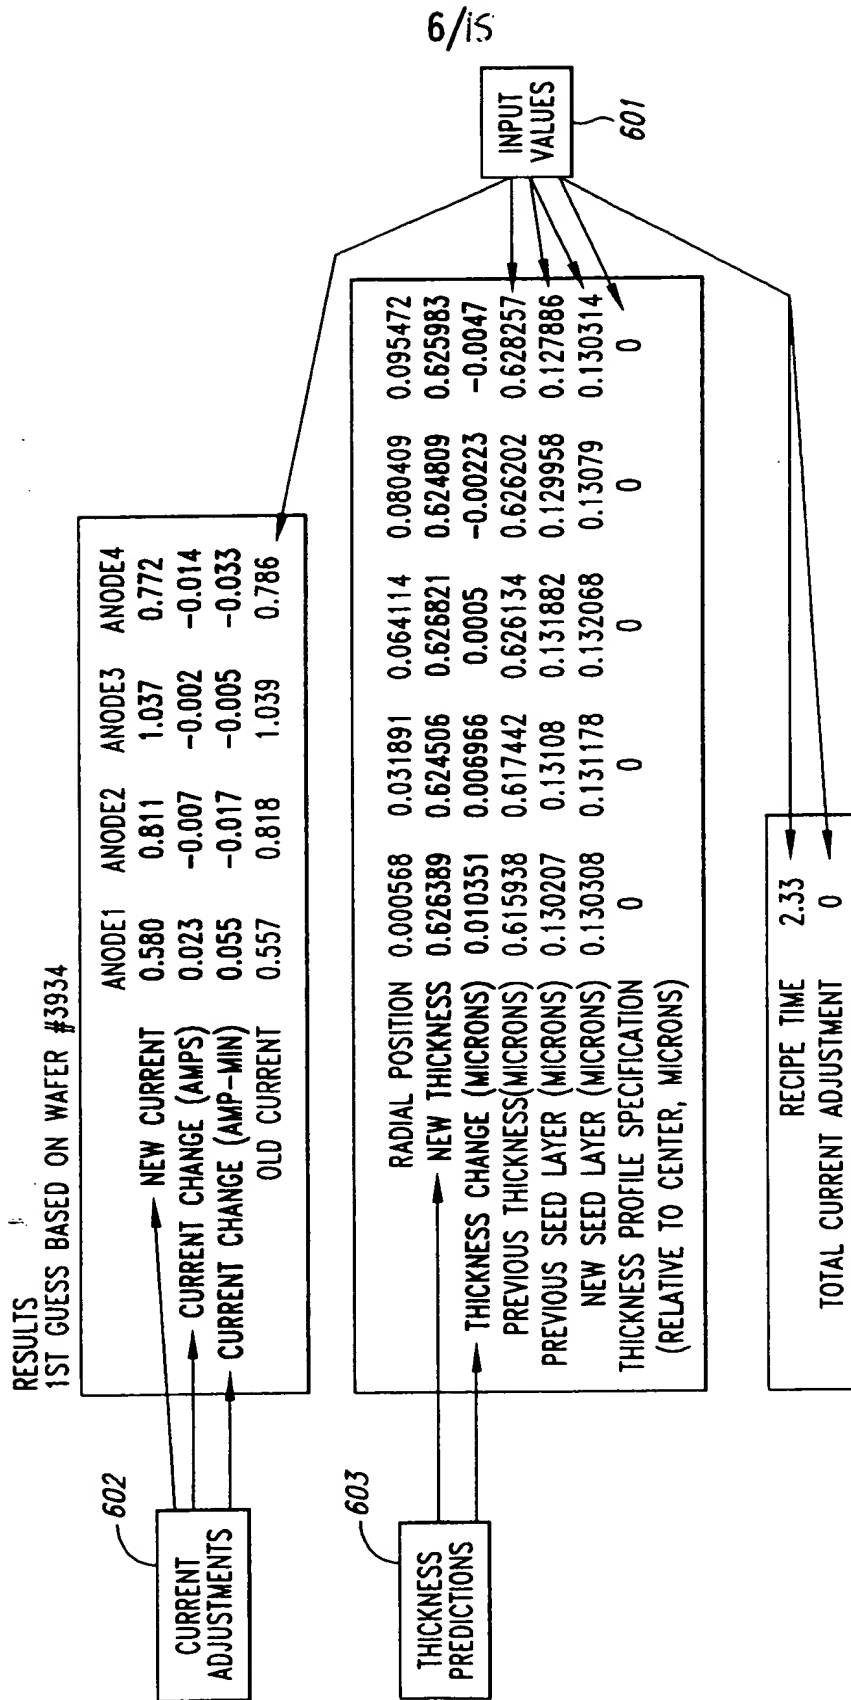


Fig. 6


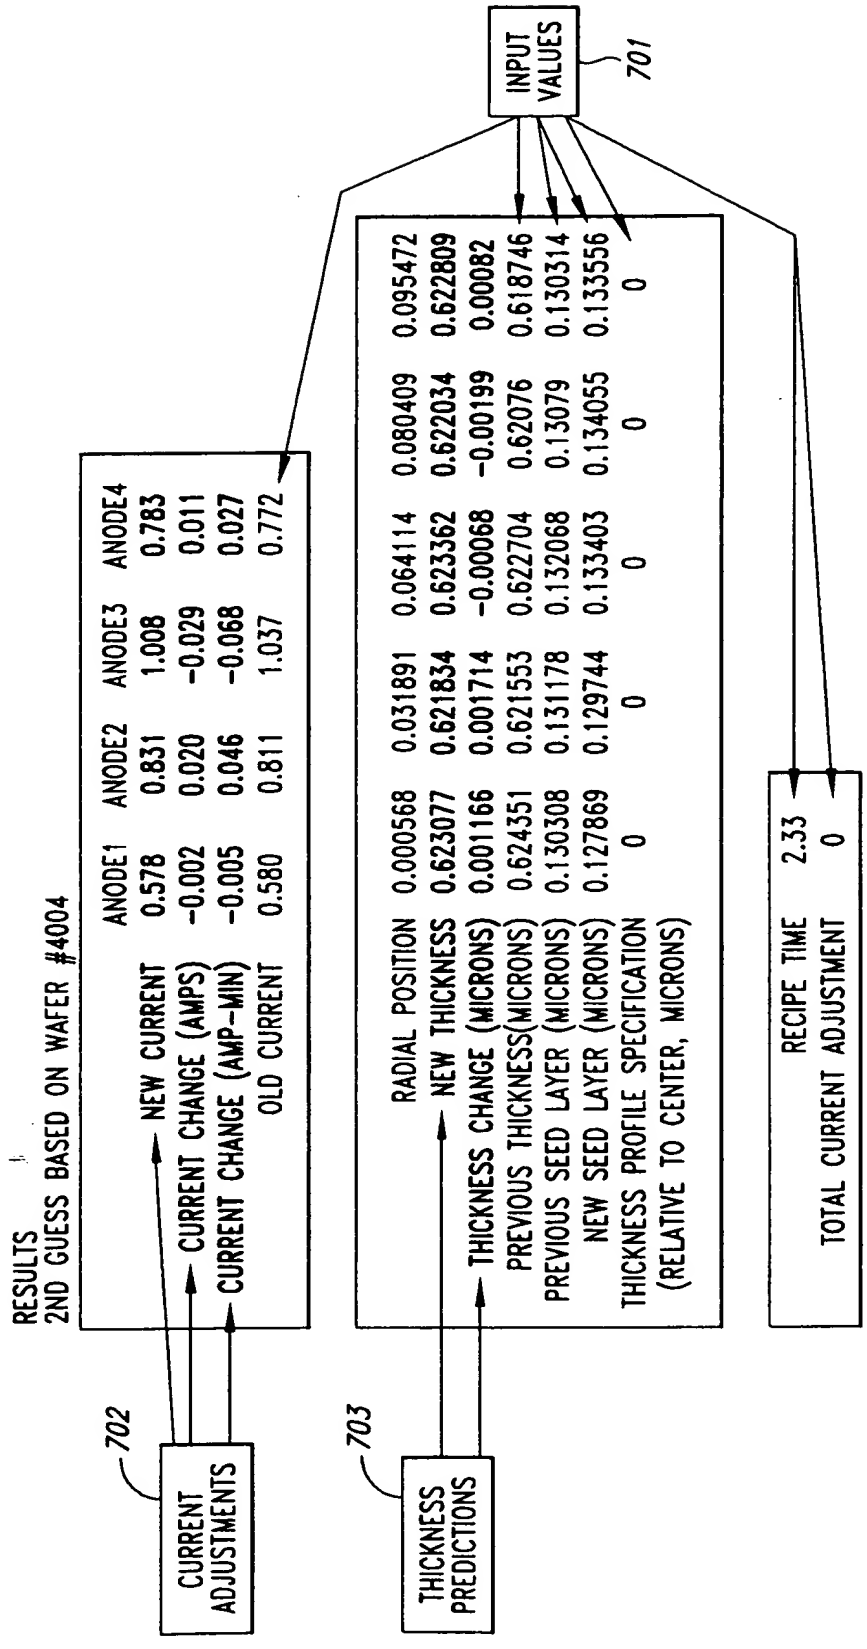


Fig. 7

FIGURE 3


Flow Velocity Components Normal to Wafer



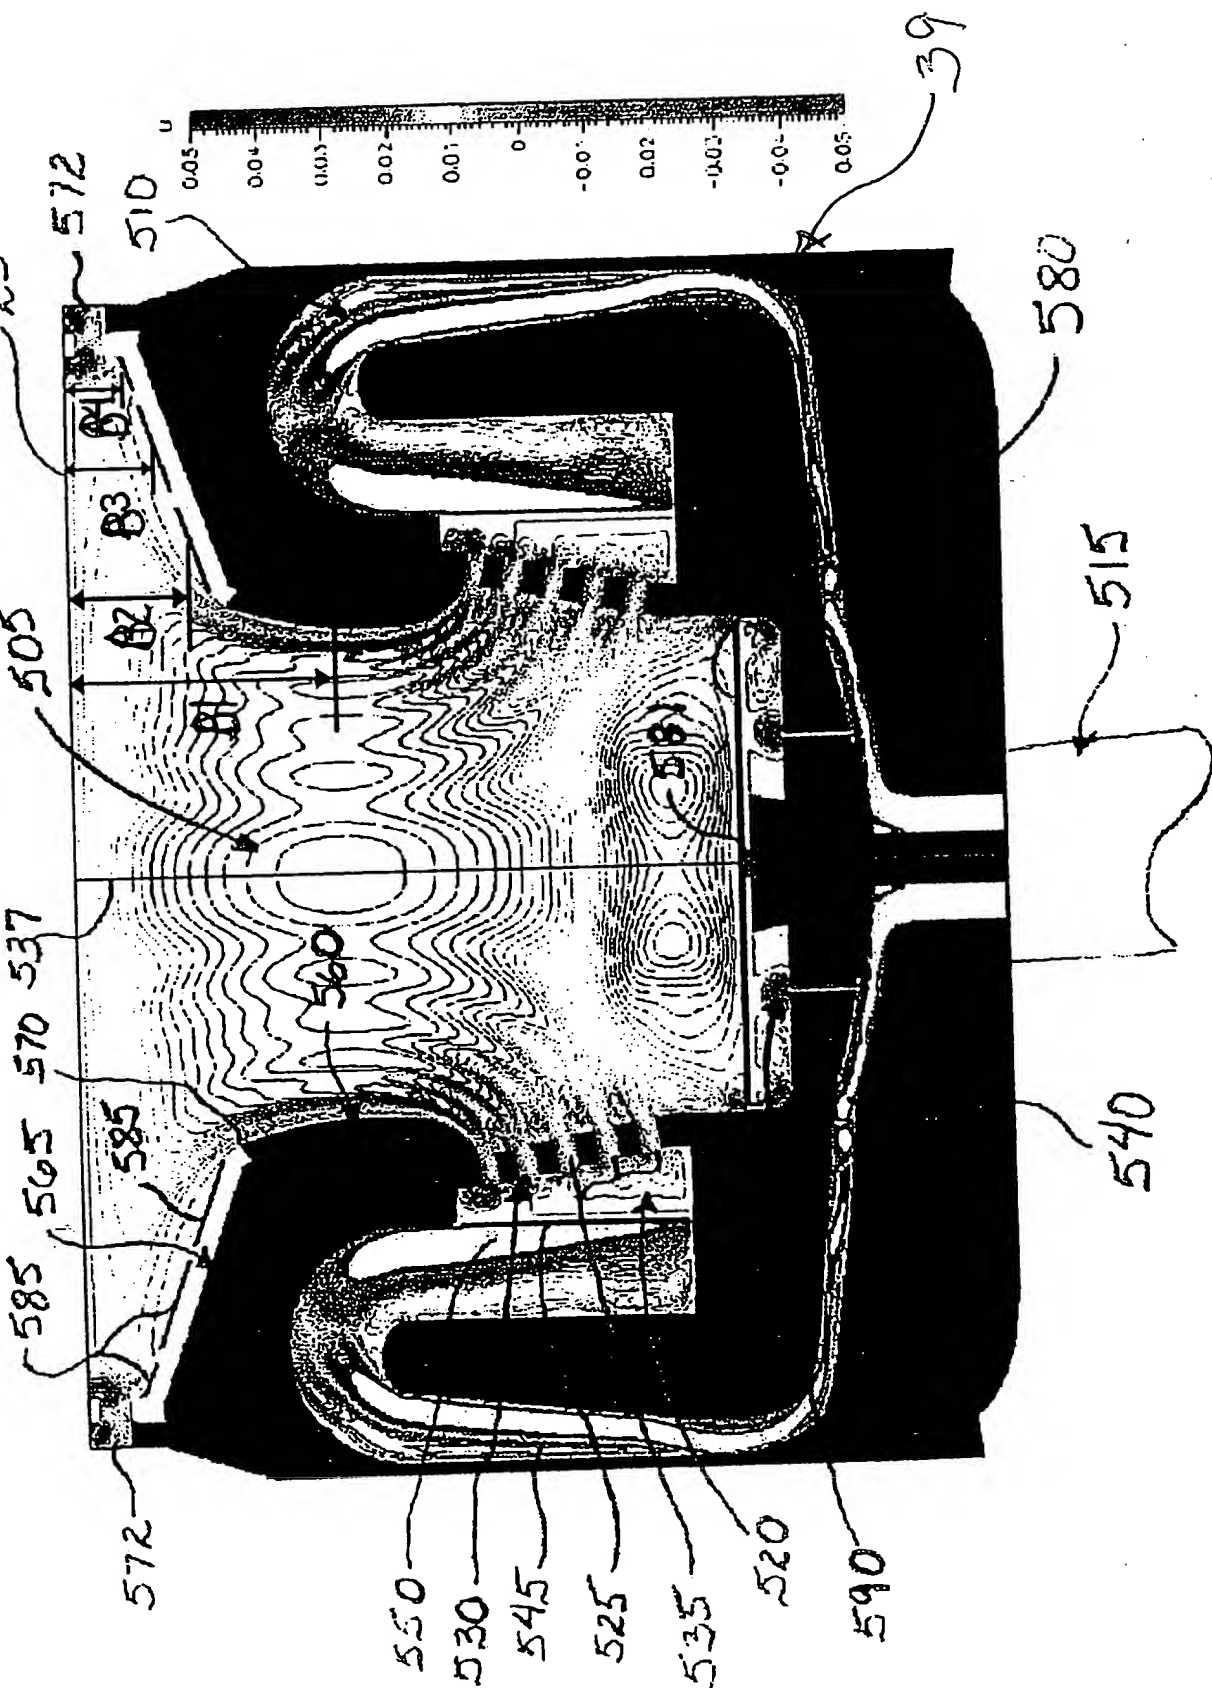

9/15

FIGURE 9

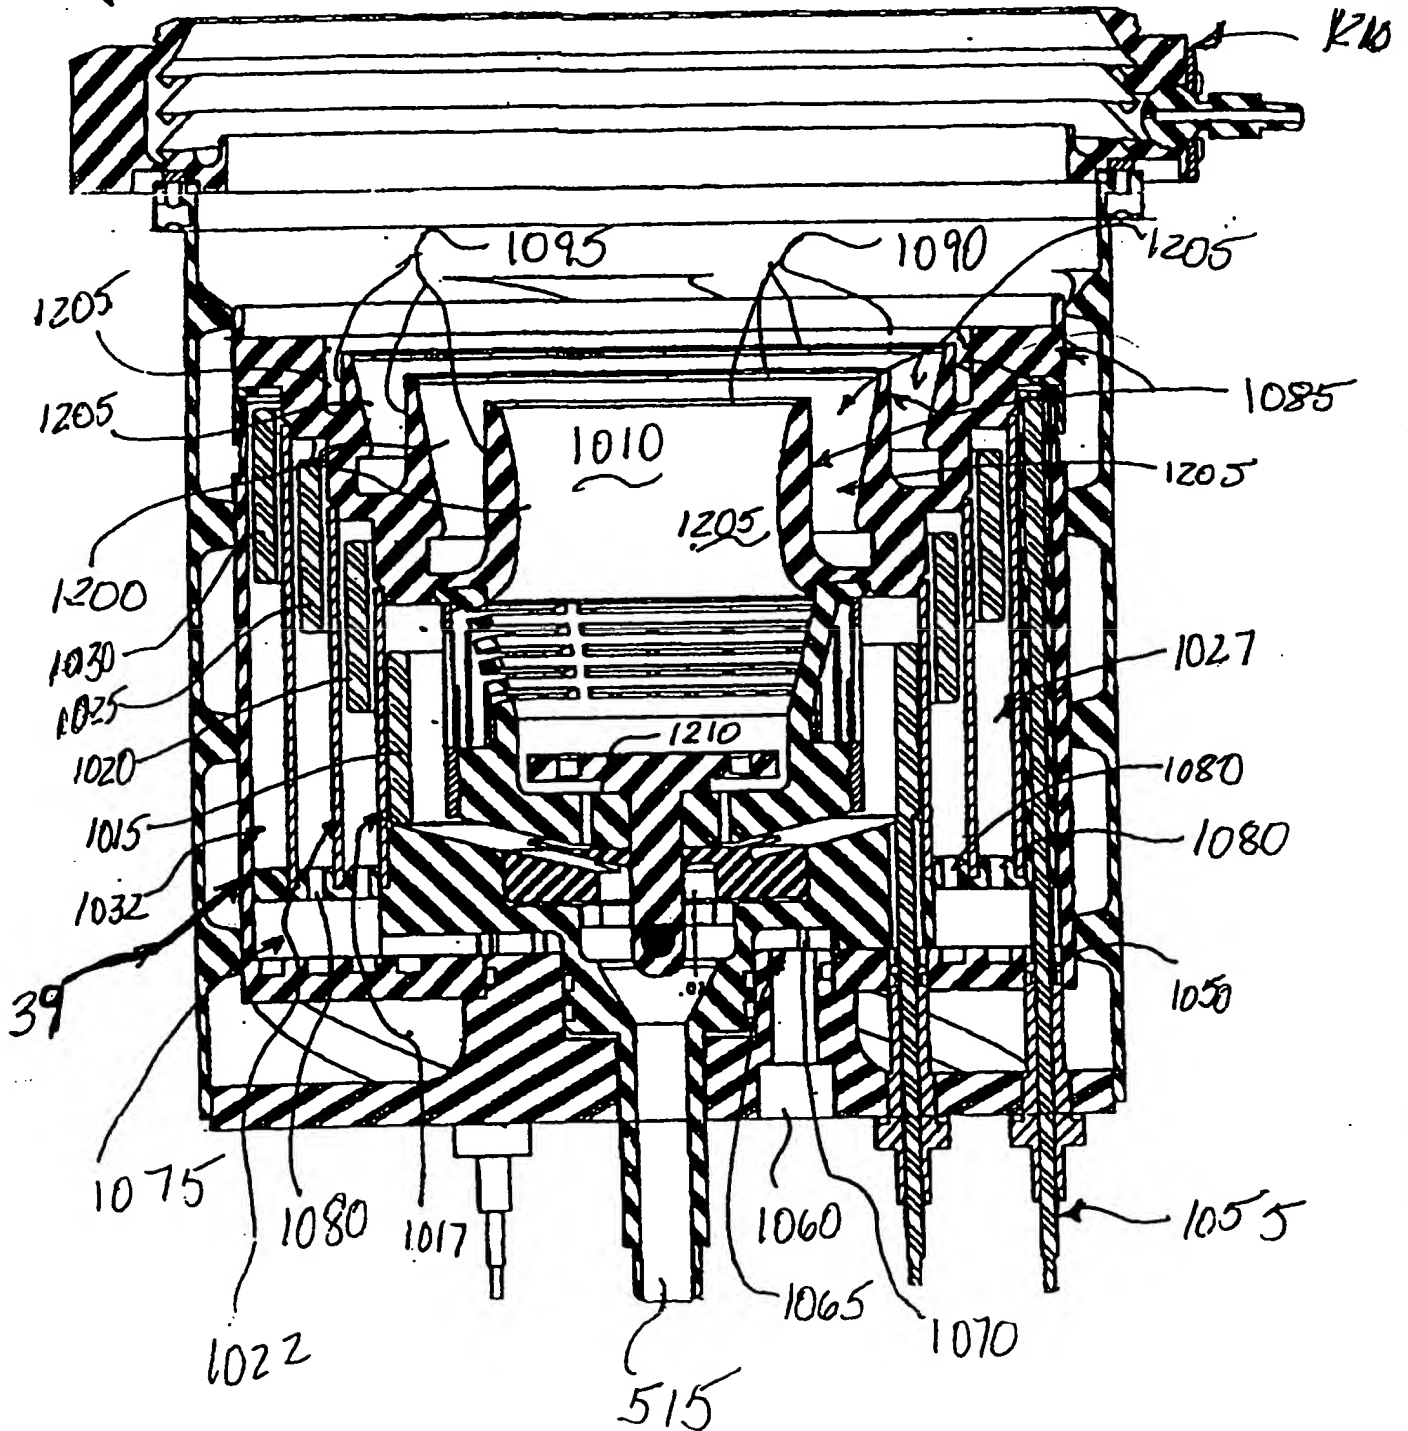



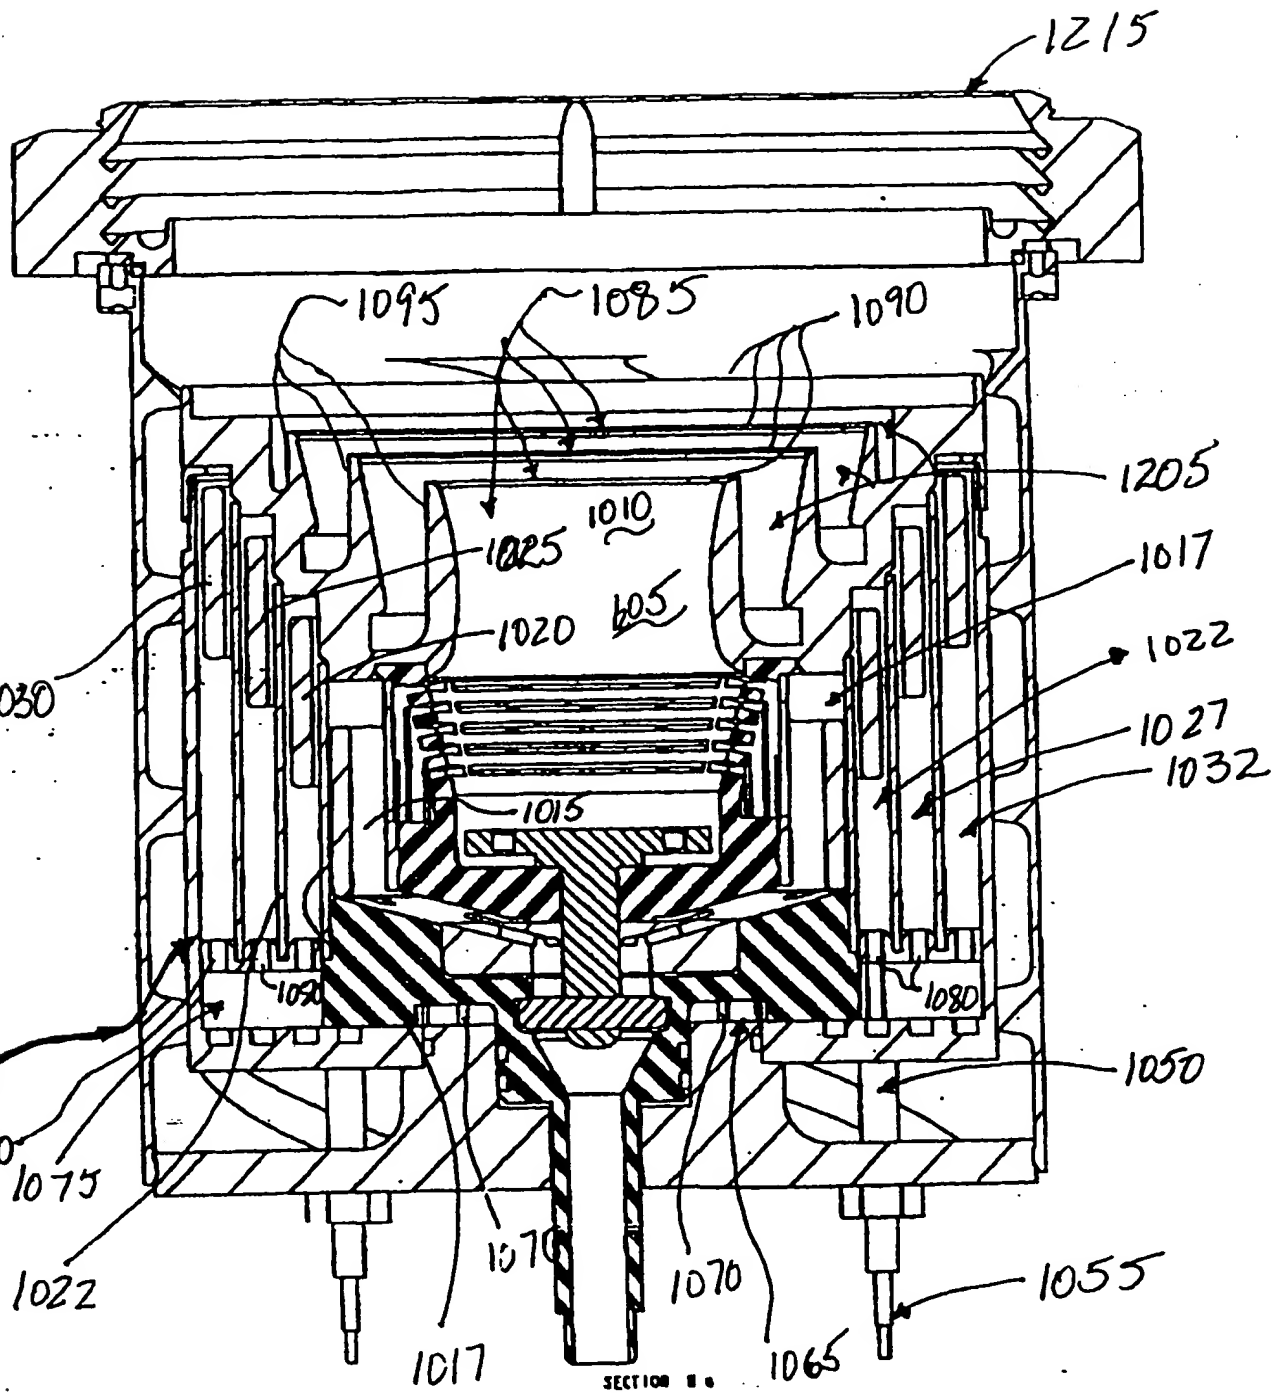


FIGURE 10

# Workpiece Normal Velocity Contours Two Flow Paths Refreshing Anodes

(Scale -0.05 to 0.05 m/sec)

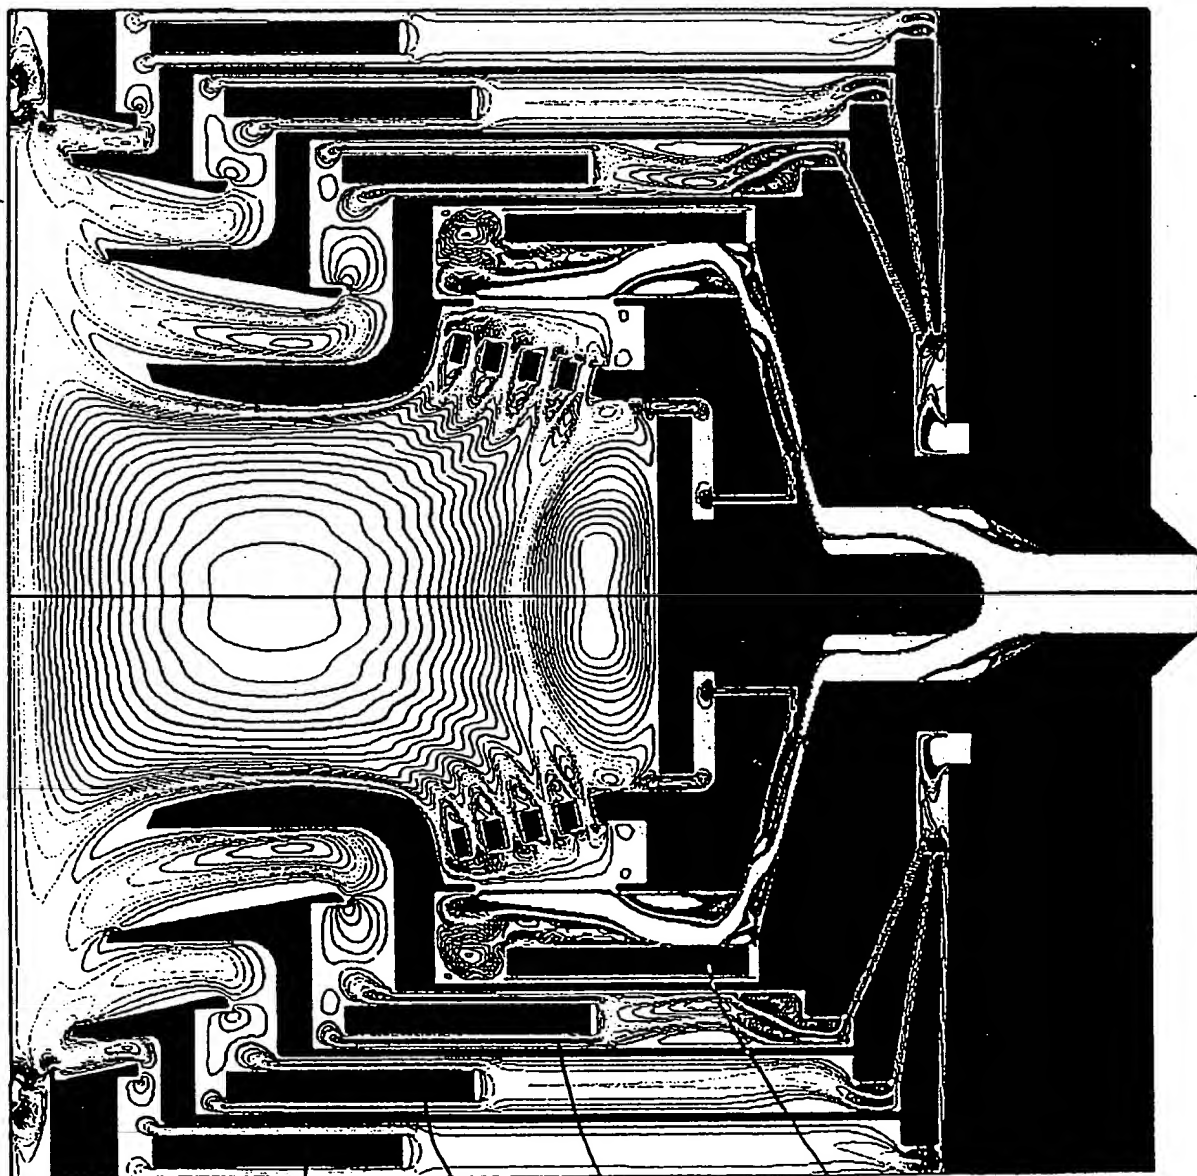

11/15

FIGURE 11

25

39

1030

1025

1020

1015

2010

# Workpiece-Normal Velocity Contours Single Flow Path (No Flow Over Anodes)

(Scale -0.05 to 0.05 m/sec)



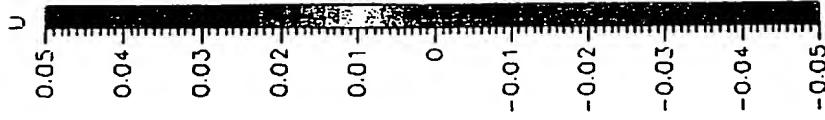


FIGURE 12

12/15

FIGURE 13

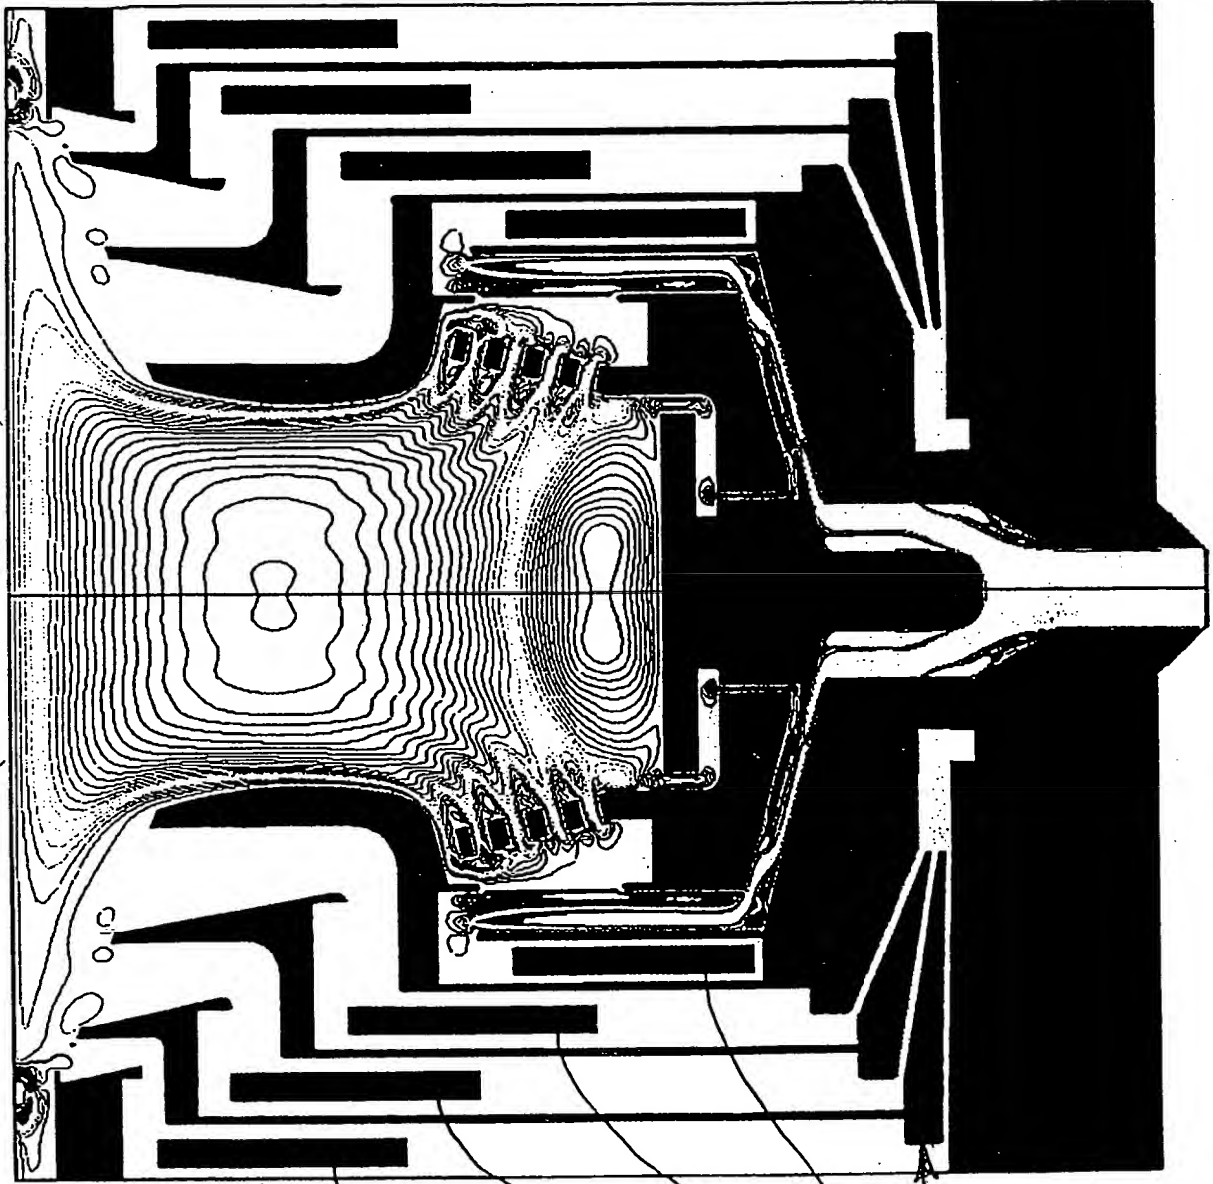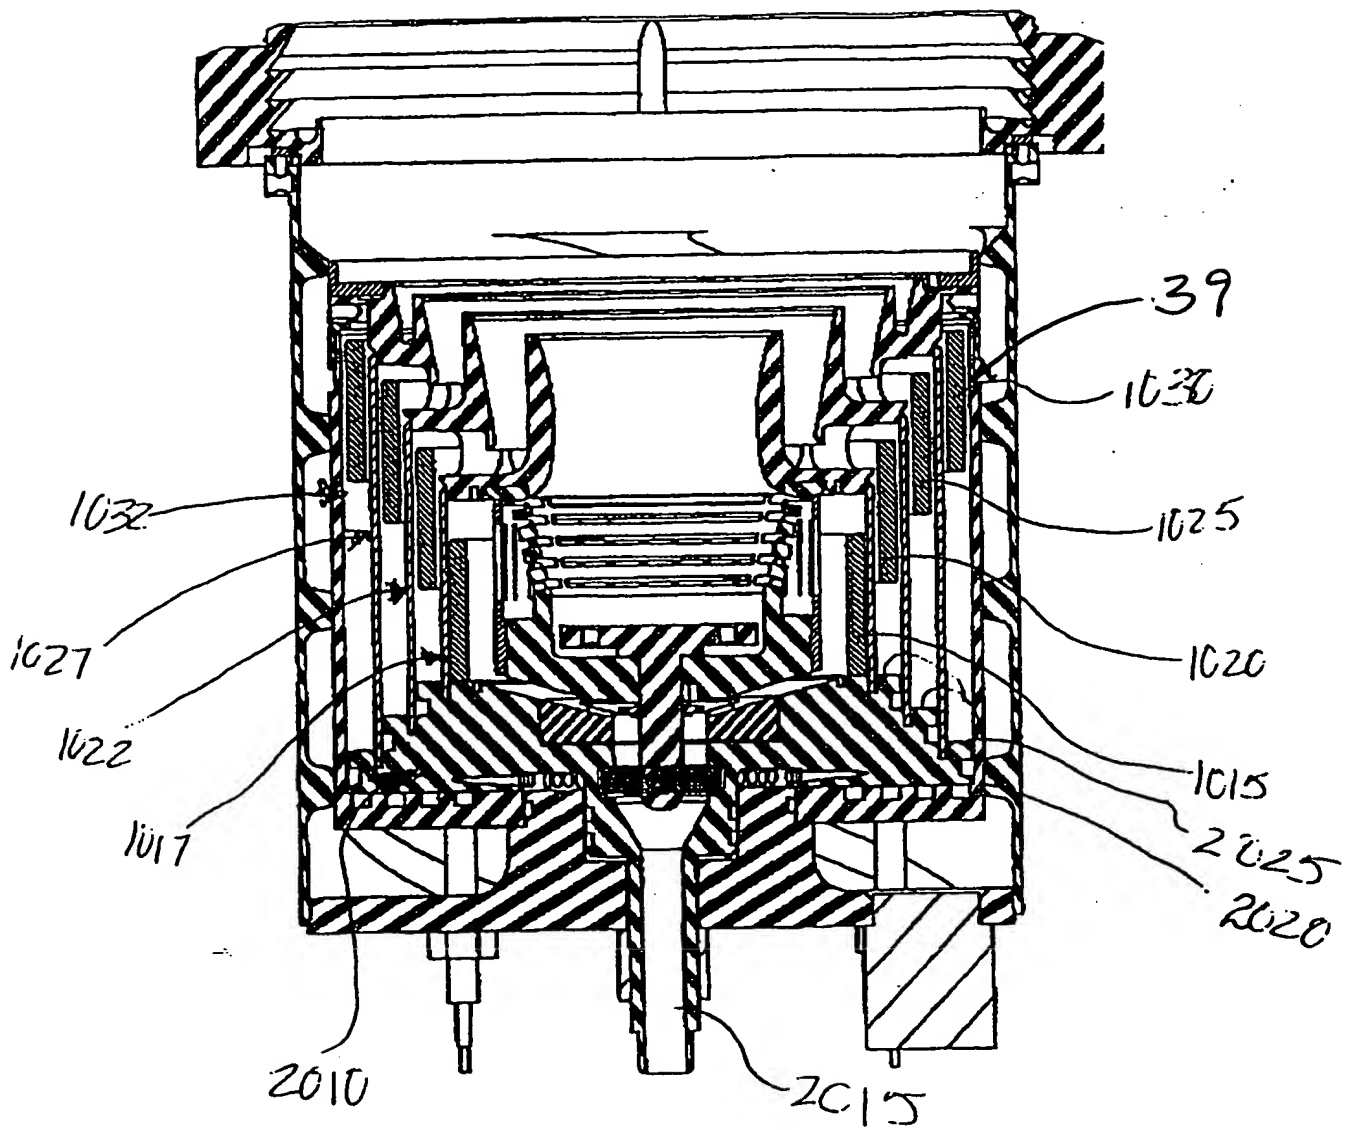

14/15

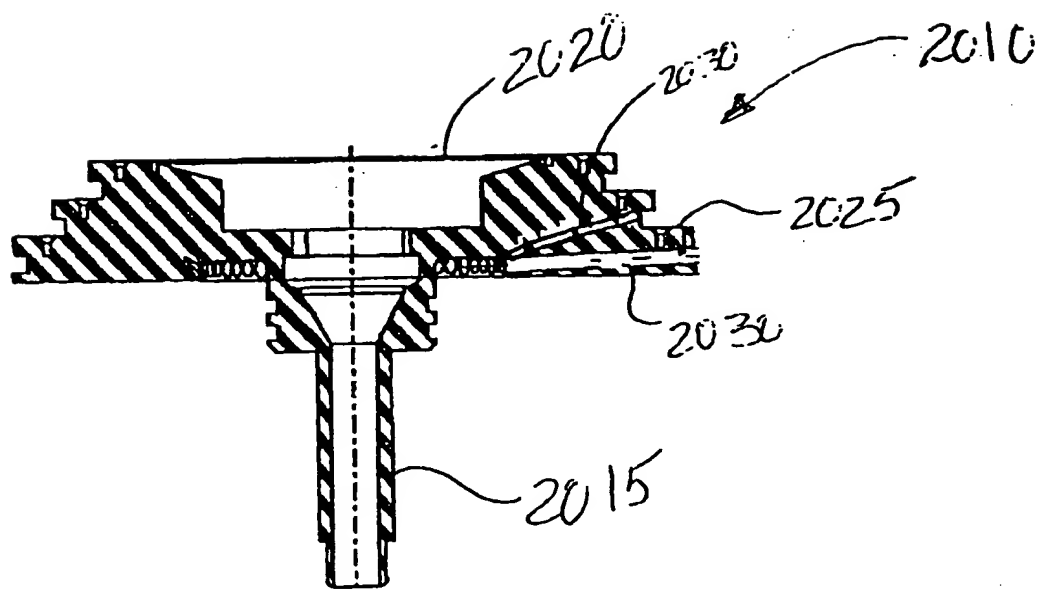


FIGURE 14

FIG. 15

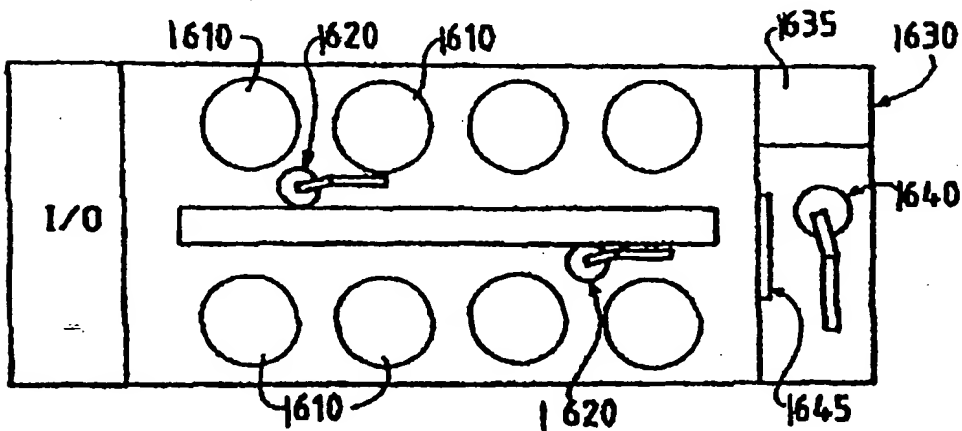
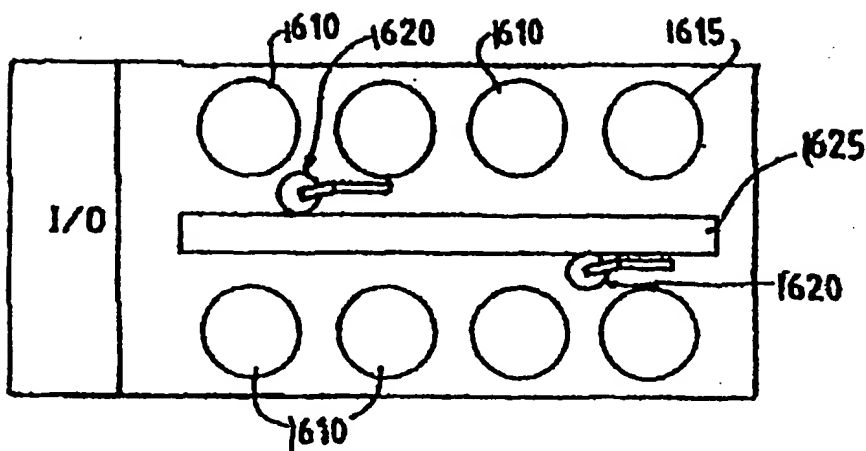


FIG. 16